

Introducing the new BlueStar® Built-in Refrigeration line. Featuring commercial style design and performance, our Refrigeration line offers advanced food preservation capabilities, unique features for the discerning home chef and unmatched customization options. Available Summer 2016.

PRODUCT FEATURES

- Dual compressors and evaporators for extended food preservation
- Durable 304 grade stainless steel interiors
- Professional-grade glass & metal shelves/bins
- Ramp-on LED lighting
- Precise OLED touch screen controls
- Full extension tray that fits commercial size sheet pans
- Extra-large, fully extending drawers with soft-close technology
- Adjustable and removable shelves and bins
- Automatic ice maker with Max Ice option
- Over-sized freezer that fits commercial size sheet pan
- Unmatched customization: choose from 750+ colors and finishes; 10 metal trims; and Left or Right door swings
- Designed and manufactured by BlueStar® in the USA

SPECIFICATIONS

Refrigerator Dimensions: 35.75"W x 26.187"D x 83.125"H Electrical Requirements: 115V, 60Hz, 15 AMP circuit

(Unit must be on a Non-GFI, dedicated outlet)

Water Pressure: 35-120psi




MODEL CONFIGURATION

Right Door Swing BBB36R1 Left Door Swing BBB36R2

ADDITIONAL CUSTOMIZATION OPTIONS


- Door color
- Door swing
- Trim options

All specifications subject to change without notice. Contact BlueStar Customer Service at (800) 449 - 8691 prior to installation or site preparation.

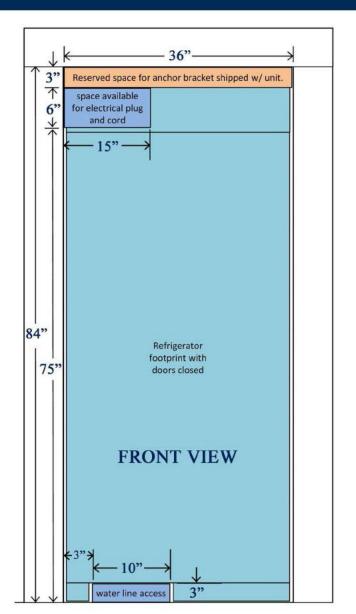

Enclosure Details:

Enclosure opening needs to be 84" tall and 36" wide to accommodate the unit. Unit is designed such that perimeter cabinet trim will fit flush with the face of the cabinet that is 24" deep. If there are plugs, cords, water lines, connectors, etc that reside on the back wall of the enclosure, they will prevent that unit from being installed flush to the trim in a 24" deep cabinet.

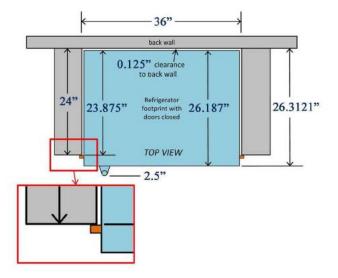

Top View:

Note that the trim (shown in orange) is preinstalled on cabinet and sits tight to the front of the 24" deep enclosure. If additional clearance is needed at back due to power cords, plugs, water lines that cannot be relocated, the depth of the enclosure will need to be enlarged accordingly.