BLUESTAR®

60” NOVA (RNB) SERIES WITH 12” GRIDDLE & CHARBROILER

With its distinctive combination of commercial-style performance and unrivaled customization options, the BlueStar® Nova Series offers unique options tailored to any individual style or cooking preference. Available in 1,000+ colors and multiple metal trim finishes, the Nova Series can be customized with integrated cooking features like griddles, charbroilers, and swing doors.



PRODUCT FEATURES

- 22,000 UltraNova™ open burners
- Gentle 130° simmer burner
- Integrated wok cooking - no wok ring needed
- Extra-large convection oven with 1850° infrared broiler that can accommodate an 18” x 26” baking sheet
- Includes full extension oven rack plus two standard racks
- Available in 1,000+ colors & multiple trim options
- Available with swing doors
- Handcrafted in Pennsylvania since 1880
- Available in Natural or LP gas

SPECIFICATIONS

Range Dimensions: 59.875”W x 24”D x 36.75”H

Oven Interior: 26.438“W x 20”D x 15“H

Top Burner Rating: 22,000 BTUs

Simmer Burner Rating: 1,300 BTUs

Charbroiler Burner Rating: 15,000 BTUs

Griddle Burner Rating: 15,000 BTUs

Oven Burner Rating: 30,000 BTUs

Infrared Broiler Rating: 15,000 BTUs

Electrical Requirements: 120V, 60Hz, 15 AMPs, 1 PH

(Unit must be on a Non-GFI, dedicated outlet)

Operating Gas Pressure: NAT: 5.0” WC, LP: 10.0” WC


Gas Line Size: 3/4”

Installation Clearance: 0” Side Cabinet, 0” Back Wall

MODEL CONFIGURATION

Six Burners with 12” Griddle & Charbroiler	RNB606GCBV2


BURNER CONFIGURATION

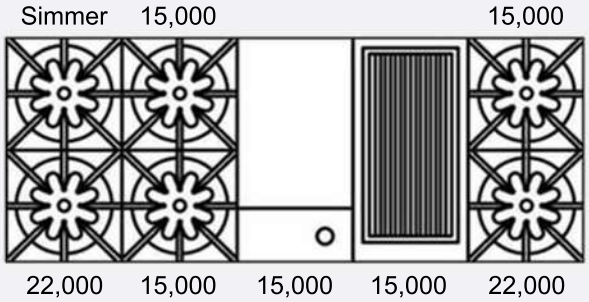


ADDITIONAL CUSTOMIZATION OPTIONS

- 1,000+ Colors & finishes
- 190 Knob colors
- Multiple trim options
- Swing doors
- Backguards

All specifications subject to change without notice. Visit www.bluestarcooking.com for most up to date information prior to installation or site preparation.

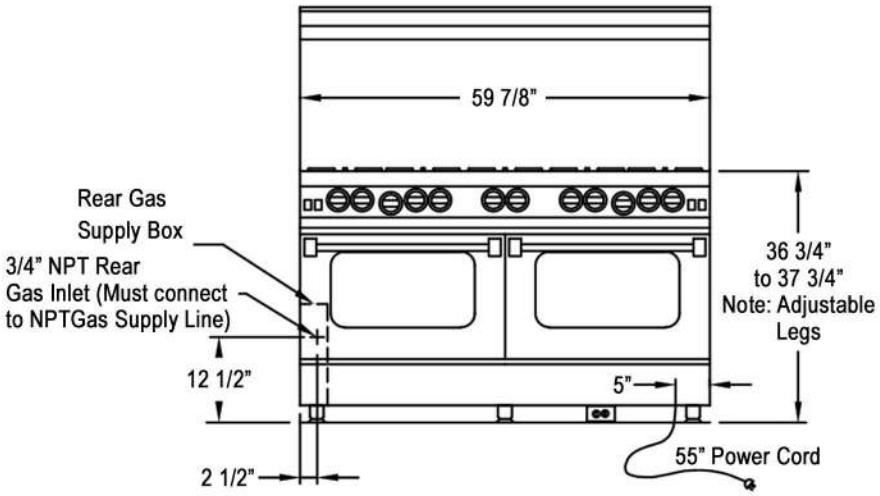

Electrical cord located in back of unit.
Location of electrical outlet must not be higher than 3” from floor if located behind the unit or can be located in an adjoining cabinet.

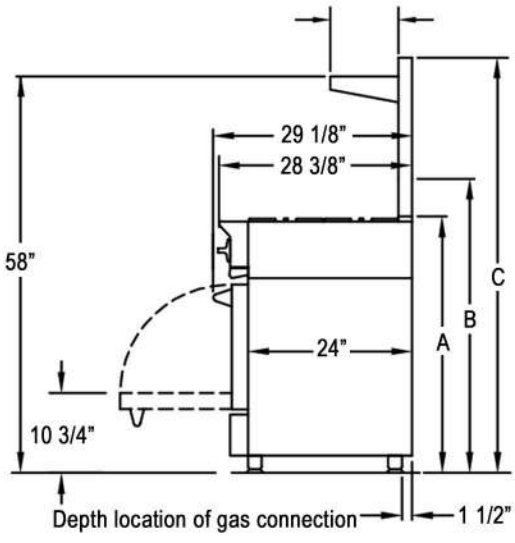


(A) Island Trim Height - 37 1/2”
(B) 6” Standard Backguard Height - 43”
(C) High Shelf Backguard Height - 60 3/4”

RELATED PRODUCTS

VENTILATION



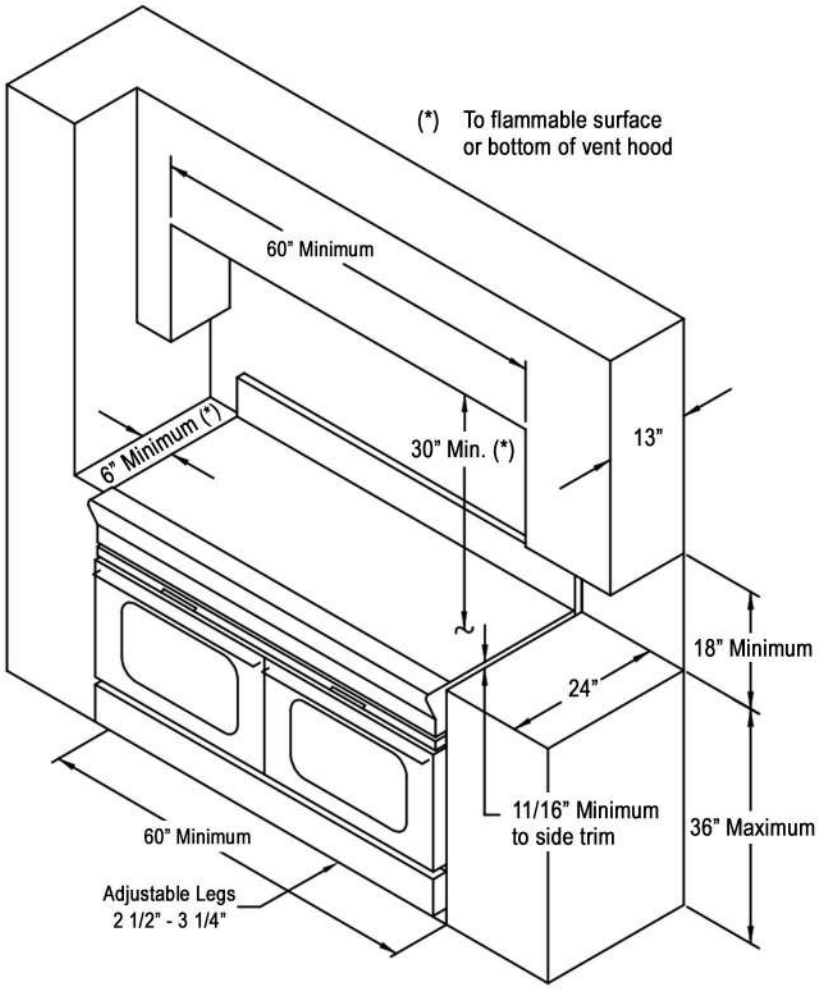

CLEARANCES